



DESCRIPTION

Acquaglobo is a floating lamp family: everyone has got a spherical shape, but in different dimensions. Acquaglobo is suitable for outdoors and elegant events. These floating lamps made in lightening polyethylene have got a particular structure, which allow Acquaglobo to light when it is in water. Acquaglobo is simple and linear, but at the same time it has a great visual impact: this floating lamp is ideal for elegant and important events near swimming pool and to create a sensual and upper class ambience.

MATERIALS

Polyethylene

COLLECTION ITEMS

Acquaglobo 30 - Floating lamps

Acquaglobo 40 - Floating lamps

Acquaglobo 50 - Floating lamps

Acquaglobo 60 - Floating lamps

Acquaglobo 70 - Floating lamps

ACQUAGLOBO

COLOURS AND FINISHES

LIGHTING COLOURS



LIGHT
WHITE

MAINTENANCE AND CLEANING

Clean the product with a damp cloth and neutral liquid soap diluted in water.

It is recommended the use of SLIDE "Clean Up" cleaner or a degreaser. Spray the cleaning product on the surface and rub with a damp cloth, than rinse. It is recommended the use of SLIDE "Bright Up" detergent for the products maintenance. This polishing protective detergent can remove the most superficial scratches.



CLEAN UP
SD CLE001

High-cleaning power
detergent degreaser.



BRIGHT UP
SD SIL001

Polishing protective
detergent.

ACQUAGLOBO

TECHNICAL DRAWINGS AND LIGHTING TECHNICAL SPECIFICATIONS



ACQUAGLOBO 30

LP SFG030 warm white (3000 K)

delivery unit: 1

product weight: 1,7 kg

packaging: 31 x 31 x 31 cm - 0,03 m³ - 2,2 kg

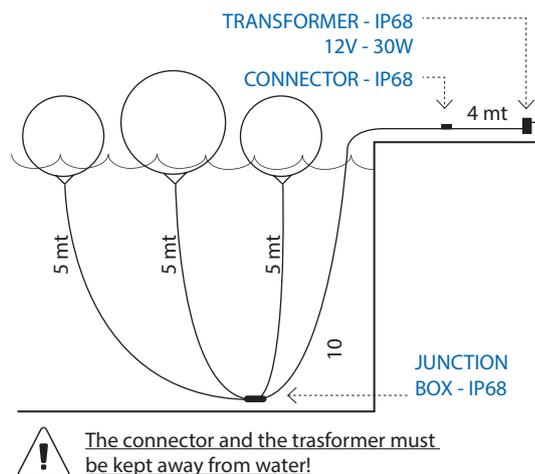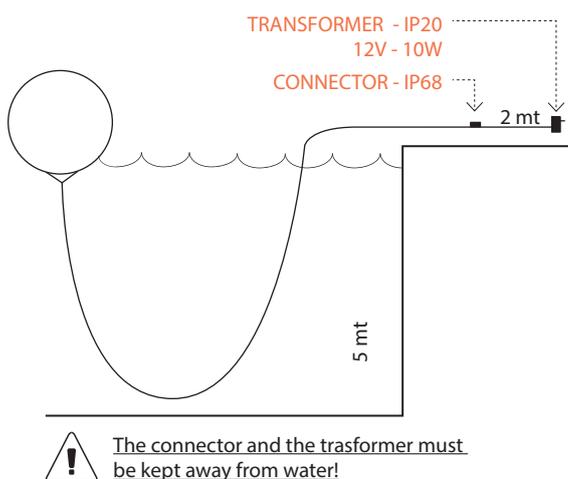

IP68 Outdoor use

LIGHT SOURCE Bulb recommended included G4 (12V) - 1x1,5 W (warm light 3000 K)

ELECTRICAL CONFIGURATION Not dimmable

CABLE Transparent - Length 5 meters

ADDITIONAL COMPONENTS Transformer [LPTRA001](#) (IP20, 12 V / 10 W), [Connector IP68](#)

Transformer [LPTRA003](#) (IP68, 12 V / 30 W), [Connector IP68](#), [Junction box IP68](#)

CERTIFICATION AND SYMBOLS

- Insulation class 2.
- Device proper to direct assembly onto normally inflammable surfaces.
- Recycling and disposal of electronic waste (WEEE).
- Total protection against penetration of dust and immersion in water.
- 100% recyclable polyethylene.
- Conformity to the European Community.

All dimensions in centimetres. Appearances, measurements and weights may slightly differ from reality.

ACQUAGLOBO

TECHNICAL DRAWINGS AND LIGHTING TECHNICAL SPECIFICATIONS


ACQUAGLOBO 40

LP SFG040 warm white (3000 K)


delivery unit: 1

product weight: 2,5 kg

packaging: 41 x 41 x 41 cm - 0,069 m³ - 3,5 kg

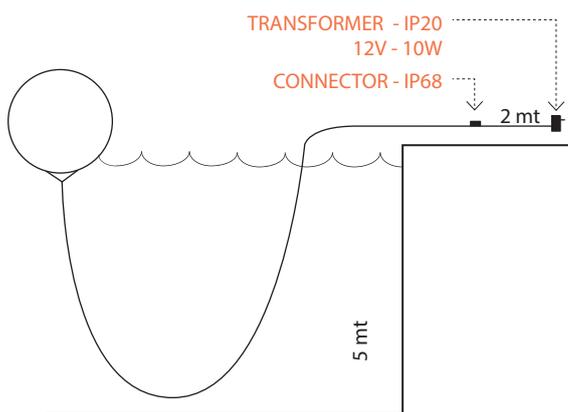

 The connector and the transformer must be kept away from water!

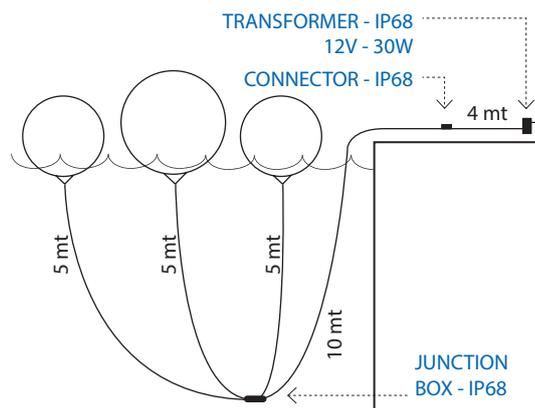

 The connector and the transformer must be kept away from water!

IP68 Outdoor use

LIGHT SOURCE Bulb recommended included G4 (12V) - 1x1,5 W (warm light 3000 K)

ELECTRICAL CONFIGURATION Not dimmable

CABLE Transparent - Length 5 meters

ADDITIONAL COMPONENTS Transformer [LPTRA001](#) (IP20, 12 V / 10 W), [ConnectorIP68](#)

Transformer [LPTRA003](#) (IP68, 12 V / 30 W), [Connector IP68](#), [Junction box IP68](#)

CERTIFICATION AND SYMBOLS

-  Insulation class 2.
-  Device proper to direct assembly onto normally inflammable surfaces.
-  Recycling and disposal of electronic waste (WEEE).
-  Total protection against penetration of dust and immersion in water.
-  100% recyclable polyethylene.
-  Conformity to the European Community.

All dimensions in centimetres. Appearances, measurements and weights may slightly differ from reality.

ACQUAGLOBO

TECHNICAL DRAWINGS AND LIGHTING TECHNICAL SPECIFICATIONS


ACQUAGLOBO 50

LP SFG050 warm white (3000 K)


delivery unit: 1

product weight: 4 kg

packaging: 51 x 51 x 51 cm - 0,133 m³ - 5 kg

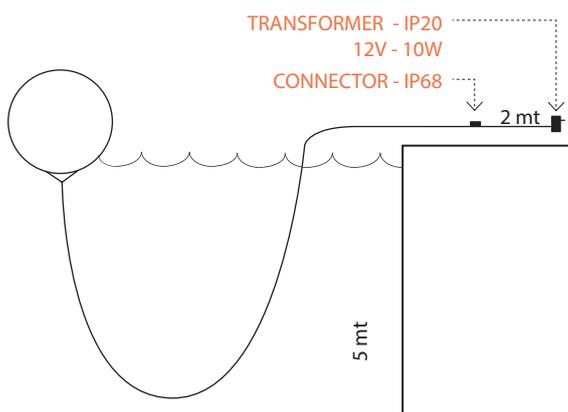

 The connector and the transformer must be kept away from water!

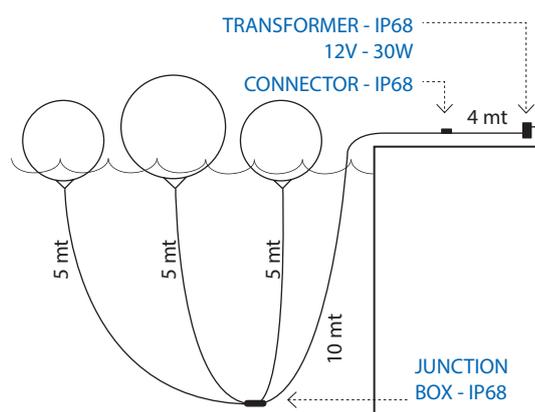

 The connector and the transformer must be kept away from water!

IP68 Outdoor use

LIGHT SOURCE Bulb recommended included G4 (12V) - 1x1,5 W (warm light 3000 K)

ELECTRICAL CONFIGURATION Not dimmable

CABLE Transparent - Length 5 meters

ADDITIONAL COMPONENTS Transformer [LPTRA001](#) (IP20, 12 V / 10 W), [Connector IP68](#)

Transformer [LPTRA003](#) (IP68, 12 V / 30 W), [Connector IP68](#), [Junction box IP68](#)

CERTIFICATION AND SYMBOLS

-  Insulation class 2.
-  Device proper to direct assembly onto normally inflammable surfaces.
-  Recycling and disposal of electronic waste (WEEE).
-  Total protection against penetration of dust and immersion in water.
-  100% recyclable polyethylene.
-  Conformity to the European Community.

All dimensions in centimetres. Appearances, measurements and weights may slightly differ from reality.

ACQUAGLOBO

TECHNICAL DRAWINGS AND LIGHTING TECHNICAL SPECIFICATIONS


ACQUAGLOBO 60

LP SFG060 warm white (3000 K)


delivery unit: 1

product weight: 5,2 kg

packaging: 61 x 61 x 61 cm - 0,227 m³ - 7,2 kg

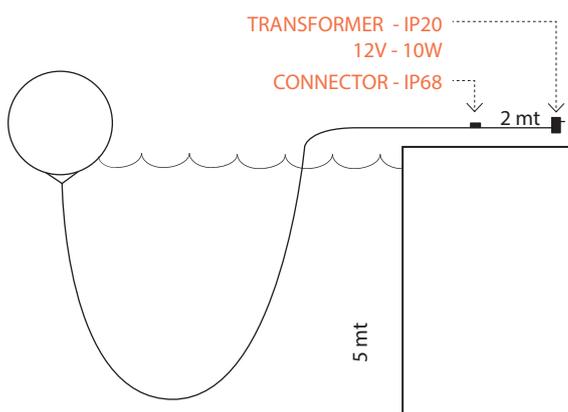

 The connector and the transformer must be kept away from water!

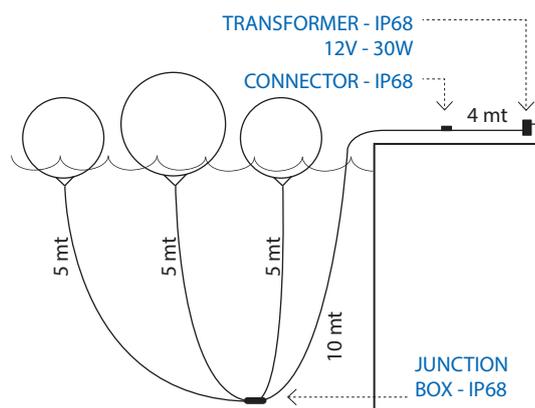

 The connector and the transformer must be kept away from water!

IP68 Outdoor use

LIGHT SOURCE Bulb recommended included G4 (12V) - 1x1,5 W (warm light 3000 K)

ELECTRICAL CONFIGURATION Not dimmable

CABLE Transparent - Length 5 meters

ADDITIONAL COMPONENTS Transformer [LPTRA001](#) (IP20, 12 V / 10 W), [Connector IP68](#)

Transformer [LPTRA003](#) (IP68, 12 V / 30 W), [Connector IP68](#), [Junction box IP68](#)

CERTIFICATION AND SYMBOLS

-  Insulation class 2.
-  Device proper to direct assembly onto normally inflammable surfaces.
-  Recycling and disposal of electronic waste (WEEE).
-  Total protection against penetration of dust and immersion in water.
-  100% recyclable polyethylene.
-  Conformity to the European Community.

All dimensions in centimetres. Appearances, measurements and weights may slightly differ from reality.

ACQUAGLOBO

TECHNICAL DRAWINGS AND LIGHTING TECHNICAL SPECIFICATIONS


ACQUAGLOBO 70

LP SFG070 warm white (3000 K)


delivery unit: 1

product weight: 7,7 kg

packaging: 71 x 71 x 71 cm - 0,358 m³ - 10,7 kg

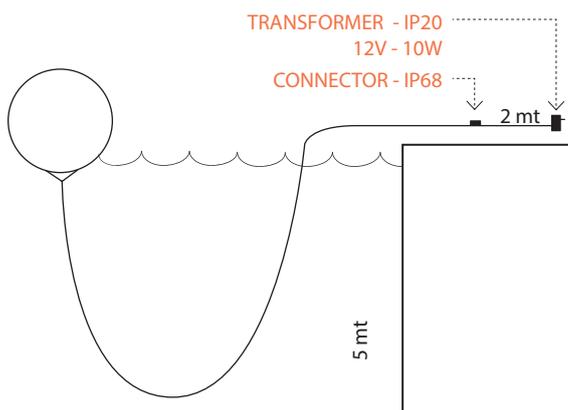

! The connector and the transformer must be kept away from water!

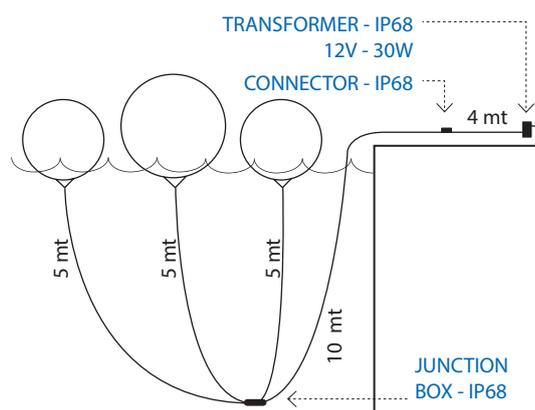

! The connector and the transformer must be kept away from water!

IP68 Outdoor use

LIGHT SOURCE Bulb recommended included G4 (12V) - 1x1,5 W (warm light 3000 K)

ELECTRICAL CONFIGURATION Not dimmable

CABLE Transparent - Length 5 meters

ADDITIONAL COMPONENTS Transformer [LPTRA001](#) (IP20, 12 V / 10 W), [Connector IP68](#)

Transformer [LPTRA003](#) (IP68, 12 V / 30 W), [Connector IP68](#), [Junction box IP68](#)

CERTIFICATION AND SYMBOLS

-  Insulation class 2.
-  Device proper to direct assembly onto normally inflammable surfaces.
-  Recycling and disposal of electronic waste (WEEE).
-  Total protection against penetration of dust and immersion in water.
-  100% recyclable polyethylene.
-  Conformity to the European Community.

All dimensions in centimetres. Appearances, measurements and weights may slightly differ from reality.

ACQUAGLOBO LED

TECHNICAL DRAWINGS AND LIGHTING TECHNICAL SPECIFICATIONS

ACQUAGLOBO LED


LASFG030

LASFG040

LASFG050

LASFG060

LASFG070

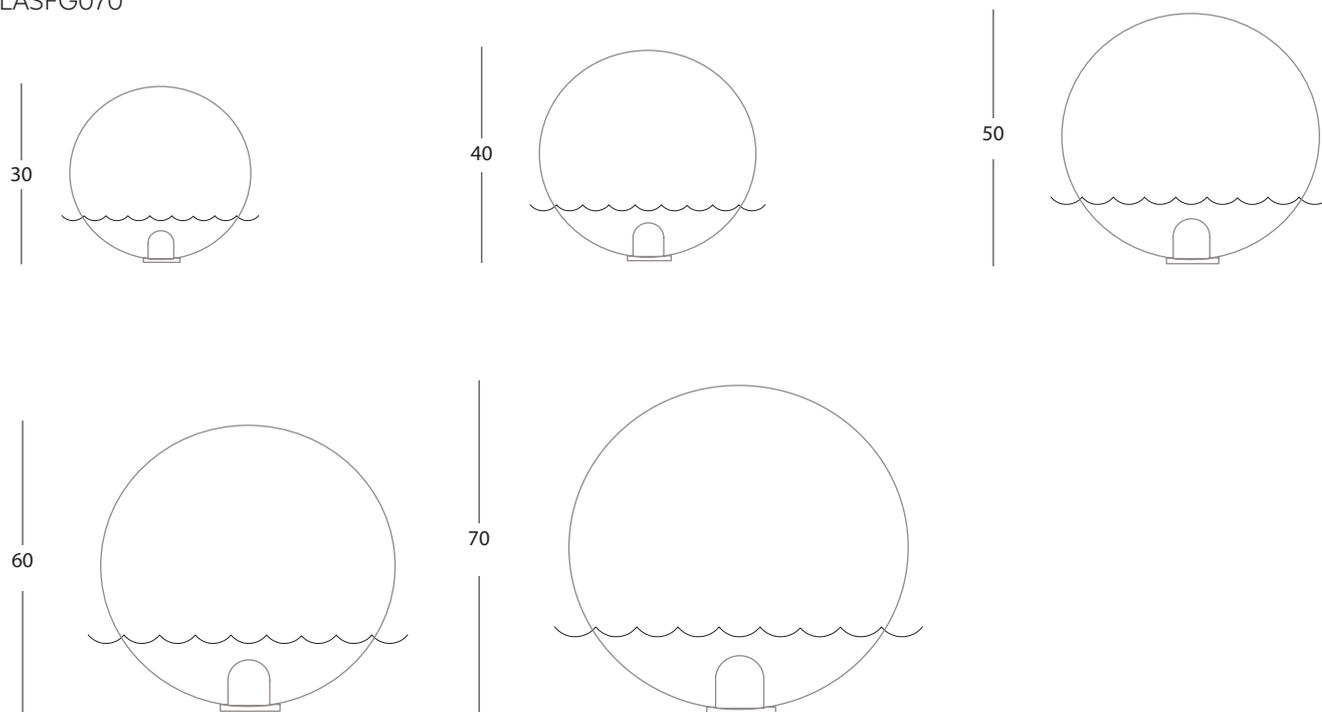

IP68 Outdoor use

LIGHT SOURCE COMPATIBLE 3 Watt battery RGB/W LED system included (IP68)

ELECTRICAL CONFIGURATION Multicolor RGB/W

ACCESSORIES Remote control included

CERTIFICATIONS AND SYMBOLS

-  RGB/W Led system included
-  Device proper to direct assembly onto normally inflammable surfaces.
-  Recycling and disposal of electronic waste (WEEE).
-  Total protection against penetration of dust and immersion in water.
-  100% recyclable polyethylene.
-  Conformity to the European Community.

All dimensions in centimetres. Appearances, measurements and weights may slightly differ from reality.