


TREAD

Design Chiaramonte & Marin

TREAD SP 28



TREAD SP 28

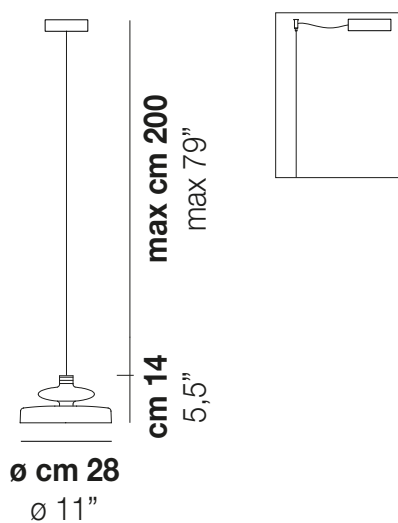

DATOS TÉCNICOS:



CERTIFICATIONS:



LED 2700K DIM2	1x12W	220-240 V 50/60 Hz	Led 2700 K 12 W 35 V 1500 lm DIM2 Phase Cut
LED 2700K DIM3	1x12W	220-240 V 50/60 Hz	Led 2700 K 12 W 35 V 1500 lm DIM3 0-10V, Push
LED 3000K DIM2	1x12W	220-240 V 50/60 Hz	Led 3000 K 12 W 35 V 1600 lm DIM2 Phase Cut
LED 3000K DIM3	1x12W	220-240 V 50/60 Hz	Led 3000 K 12 W 35 V 1600 lm DIM3 0-10V, Push

VOLUME	Mc 0,05
PESO BRUTO	Kg 4
PESO NETO	Kg 2,7

download



ACABADO DEL DIFUSOR




CR

FU

TB

VA

ACABADO PARTES METÁLICAS

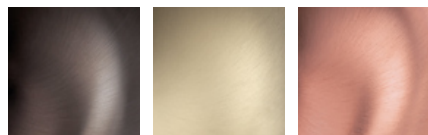


BHS

BKS

RAS

OTRAS VERSIONES DISPONIBLES

Haga clic en la versión para ir a la versión web del producto



TREAD SP