


PLISSE'

Design Chiaramonte & Marin

PLISSE' SP G



PLISSE' SP G

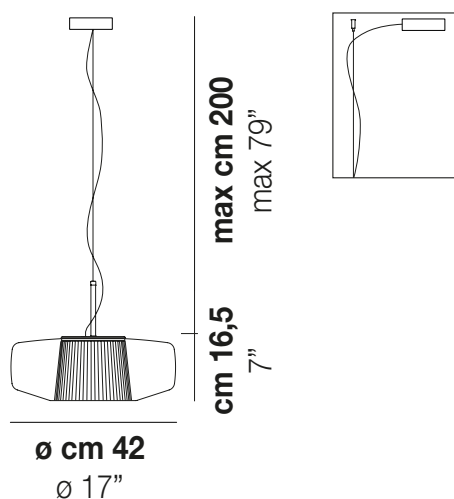

DATOS TÉCNICOS:



LED 2700K DIM2 1x12W 220-240 V 50/60 Hz

LED 2700K DIM3 1x12W 220-240 V 50/60 Hz

LED 3000K DIM2 1x12W 220-240 V 50/60 Hz

LED 3000K DIM3 1x12W 220-240 V 50/60 Hz

CERTIFICATIONS:



Led 2700 K 12 W 35 V 1500 lm DIM2 Phase Cut

Led 2700 K 12 W 35 V 1500 lm DIM3 0-10V, Push

Led 3000 K 12 W 35 V 1600 lm DIM2 Phase Cut


Led 3000 K 12 W 35 V 1600 lm DIM3 0-10V, Push

VOLUME Mc 0,14
PESO BRUTO Kg 8,5
PESO NETO Kg 5

download



ACABADO DEL DIFUSOR

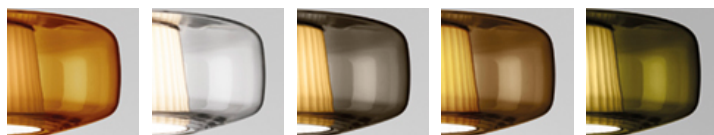

ADPS


CRPS

FUPS

TBPS

VAPS

ACABADO PARTES METÁLICAS



AVS

BR2