


RIFLESSO

Design Chiaramonte & Marin

RIFLESSO AP P



RIFLESSO AP P

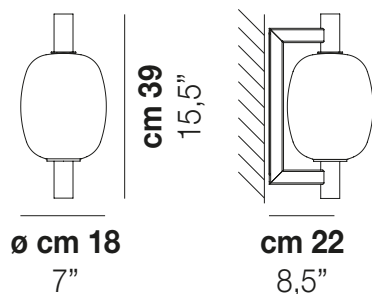

DATOS TÉCNICOS:



LED 2700K DIM2	1x12W	220-240 V 50/60 Hz
LED 2700K DIM3	1x12W	220-240 V 50/60 Hz
LED 3000K DIM2	1x12W	220-240 V 50/60 Hz
LED 3000K DIM3	1x12W	220-240 V 50/60 Hz

CERTIFICATIONS:



Led 2700 K 12 W 35 V 1500 lm DIM2 Phase Cut
Led 2700 K 12 W 35 V 1500 lm DIM3 0-10V, Push
Led 3000 K 12 W 35 V 1600 lm DIM2 Phase Cut
Led 3000 K 12 W 35 V 1600 lm DIM3 0-10V, Push

VOLUME	Mc 0,08
PESO BRUTO	Kg 3,5
PESO NETO	Kg 2,2

download



ACABADO DEL DIFUSOR




AMTR

CRTR

FUTR

ACABADO PARTES METÁLICAS



BKS

RAV