
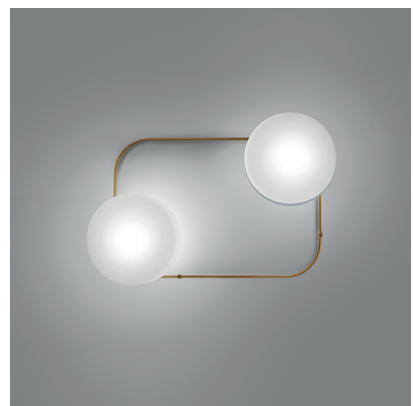



TIER

Design Debonademeo

TIER PL M

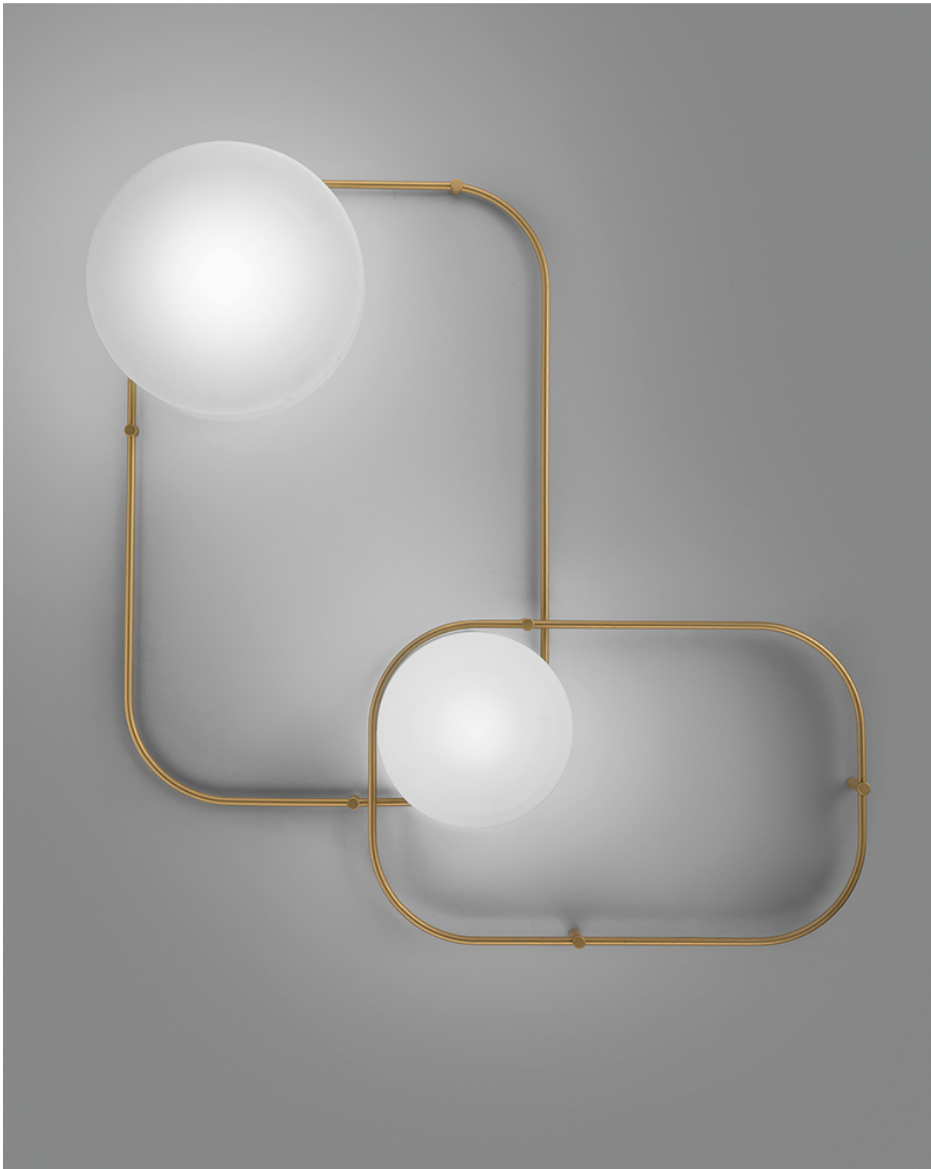

TIER PL M

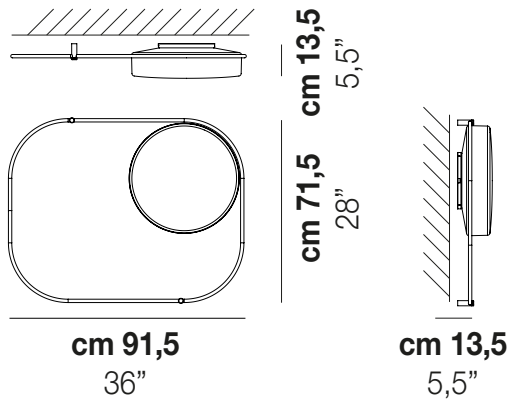

DATOS TÉCNICOS:



LED 2700K DIM2	1x19W	220-240 V 50/60 Hz
LED 2700K DIM3	1x19W	220-240 V 50/60 Hz
LED 3000K DIM2	1x19W	220-240 V 50/60 Hz
LED 3000K DIM3	1x19W	220-240 V 50/60 Hz

CERTIFICATIONS:



Led 2700 K 19 W 39 V 2850 lm DIM2 Phase Cut
Led 2700 K 19 W 39 V 2850 lm DIM3 0-10V, Push
Led 3000 K 19 W 39 V 2850 lm DIM2 Phase Cut
Led 3000 K 19 W 39 V 2850 lm DIM3 0-10V, Push

VOLUME	Mc 0,15
PESO BRUTO	Kg 8
PESO NETO	Kg 5,8

download



ACABADO DEL DIFUSOR



BCST


ACABADO PARTES METÁLICAS



OTV

OTRAS VERSIONES DISPONIBLES

Haga clic en la versión para ir a la versión web del producto

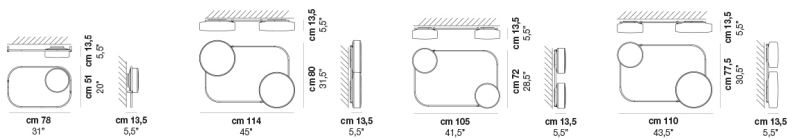

TIER TIERPP P

TIER TIERPP 2M

TIER TIERPP 2P

TIER TIERPP MP