


## PURE

Design Pio e Tito Toso

## PURE SP



## PURE SP

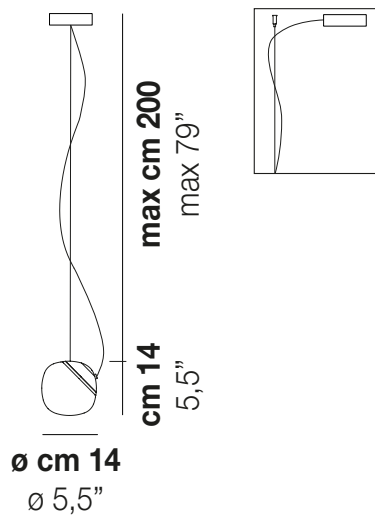

### DATOS TÉCNICOS:



LED 2700K DIM2	1x12W	220-240 V 50/60 Hz
LED 2700K DIM3	1x12W	220-240 V 50/60 Hz
LED 3000K DIM2	1x12W	220-240 V 50/60 Hz
LED 3000K DIM3	1x12W	220-240 V 50/60 Hz

### CERTIFICATIONS:



Led 2700 K 12 W 35 V 1500 lm DIM2 Phase Cut

Led 2700 K 12 W 35 V 1500 lm DIM3 0-10V, Push

Led 3000 K 12 W 35 V 1600 lm DIM2 Phase Cut

Led 3000 K 12 W 35 V 1600 lm DIM3 0-10V, Push

VOLUME	Mc 0,04
PESO BRUTO	Kg 3,7
PESO NETO	Kg 2,7

download




### ACABADO DEL DIFUSOR



BCSF

CRTR

### ACABADO PARTES METÁLICAS



ANT

BR2