


PURE

Design Pio e Tito Toso

PURE SP



PURE SP

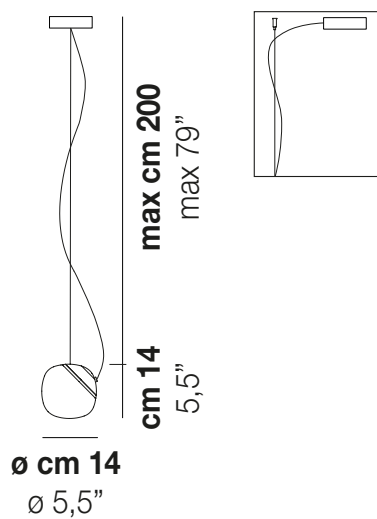

DATOS TÉCNICOS:



CERTIFICATIONS:



LED 2700K DIM2	1x12W	220-240 V 50/60 Hz	Led 2700 K 12 W 35 V 1500 lm DIM2 Phase Cut
LED 2700K DIM3	1x12W	220-240 V 50/60 Hz	Led 2700 K 12 W 35 V 1500 lm DIM3 0-10V, Push
LED 3000K DIM2	1x12W	220-240 V 50/60 Hz	Led 3000 K 12 W 35 V 1600 lm DIM2 Phase Cut
LED 3000K DIM3	1x12W	220-240 V 50/60 Hz	Led 3000 K 12 W 35 V 1600 lm DIM3 0-10V, Push

VOLUME	Mc 0,04
PESO BRUTO	Kg 3,7
PESO NETO	Kg 2,7

download




ACABADO DEL DIFUSOR



BCSF

CRTR

ACABADO PARTES METÁLICAS



ANT

BR2